

Fuzzy EDF Algorithm for Soft Real Time Systems

¹P.Vijayakumar, ²P.Aparna

¹Asst.Prof (Sr.G)/E.C.E., SRM University, Kattankulathur, Chennai.
 Vijay_at23@rediffmail.com

²(M.Tech-Embedded Systems) SRM University, Kattankulathur, Chennai.
 aparnapratti@gmail.com.

Abstract - EDF is a classic dynamic embedded real-time multi-task scheduling algorithm. In an embedded softreal-time system, the deadline missing ratio is an important metric to evaluate system performance. When an embedded soft real-time system is overloaded, EDF algorithm is not effective. Considering the unsteadiness and unpredictability of a practical task running environment due to the unsteadiness of network communication and the time estimation deviation, it is necessary to introduce Fuzzy concept and theory to the scheduling field of embedded soft real-time application systems. In fuzzy scheduling model, all task's criticality and deadline distance are described with Fuzzy set. In our scheduling algorithm, a task's scheduling priority is gotten by looking up the inference rule table with its Fuzzy deadline distance and Fuzzy criticality patterns. By comparing to traditional EDF algorithm toFUZZY EDFAlgorithm FUZZYEDFAlgorithm will have the less miss dead line ratio.

Key Words - Fuzzify, Miss dead line ratio, Fuzzy Inference, EDF.

1. INTRODUCTION

Many real-time applications require periodic activities that have to be cyclically executed at fixed rates and withinspecific deadlines. Real operating systems have to manage many concurrent applications with varying resource requirements. Typically, each periodic instance is assigneda relative deadline equal to the task period and is treated as a hard job. Applications with such time-dependent resource requirements are often referred to as soft real-time.Schedulability analysis of periodic task sets can easily be performed both under fixed and dynamic priority assignments. EDF (Earliest Deadline First) is one of the most classic dynamic priority scheduling algorithms in which thepriority of a task is determined according to its deadline distance. A task which has the shortest deadline distance is allocated the highest priority, and then it is first scheduled.Under certain conditions, Earliest Deadline First (EDF) is an optimal dynamic scheduling algorithm in resource sufficient environments. EDF algorithm has Utilization bound of 100%.the Schedulability test for EDF is:

$$U \leq 1 \quad (1)$$

Where

e_i is the worst case execution time of task,

P_i is the respective inter arrival times.

EDF algorithm is a dynamic algorithm that does not require processes to be periodic. Whenever process needs the CPU time,it announces its presence and its dead line. If a soft real-time system is overloaded, the distribution of miss deadline ratio is not rectangular in the EDFscheduling system. The usually scene is some tasks have many miss deadlines and some tasks have not any missdeadlines. Thus, many tasks may have noticeable degradation in quality of service when the real-time system is overloaded. So we should have a mechanism to distribute the miss deadlines uniformlyamong all tasks.

```

Turbo C++ IDE
enter number of the tasks3
enter the task0
enter the execution time3
enter the release time1
enter dead line4
enter the task3
enter the execution time4
enter the release time0
enter dead line5
enter the task0
enter the execution time1
enter the release time0
enter dead line3
u=0.750000a=1.250000a=1.883333
tasks is not feasible task is processing task is processing the processing task
is:Miss value is:0
mis value is:0.000000
task is missing dead linemis value is:1mis value is:1
mis value is:1.000000
task is missing dead linemis value is:2mis value is:2
mis value is:2.000000
mis ratio is:0.666667_
    
```

Figure 1. Output of TRADITIONAL EDF Algorithm

Considering the unsteadiness and unpredictability characteristics of the practical tasks' running environment, it is necessary to employ the fuzzy control theory to dynamically adjustthe priority of each task. In the Fig1 the miss dead line ratio of the task is 66.6% under overload conditions.

2. FUZZY INFERENCE SYSTEM

Fuzzy logic is extension of Boolean logic dealing with the concept of partial truth which denotes the extension to which proposition is true. Whereas classic logic holds that everything can be expressed interms of binary numbers. Fuzzy logicdeals with Boolean truth value with degree of truth. Degree of truth is often employed to capture the imprecise modes of reasoning that play an essential role in the human ability to make decisions in an environment ofuncertainty and imprecision. Fuzzy Inference Systems (FIS) are conceptually very simple. They consist of an input, a processing, and an output stage. The input stage maps the inputs, such as frequency of reference, recency of reference,

and so on, to the appropriate membership functions and truth values. The processing stage invokes each appropriate rule and generates a corresponding result. It then combines the results. Finally, the output stage converts the combined result back into a specific output value. The five steps toward a fuzzy inference are as follows:

- Fuzzifying inputs
- Applying fuzzy operators
 - Applying implication methods
 - Aggregating outputs
 - Defuzzifying results

In this paper, we proposed an improved EDF based on fuzzy inference scheduling model which is more suitable for embedded soft real-time systems in an uncertain environment. In our model, the scheduling priority of a task is mainly decided by its fuzzified deadline distance and fuzzified criticality.

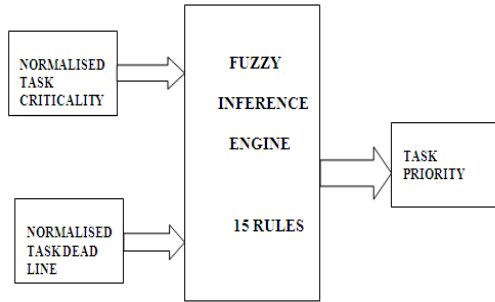


Figure 2. Process to Get Scheduling Priority by Fuzzy Inference

This figure illustrates the process to get the scheduling priority by fuzzy inference. A task’s criticality and deadline distance are fuzzified by their domain transformers and fuzzifiers; after getting a task’s fuzzy sets of deadline distance and criticality, we match these fuzzy sets with standard fuzzy set patterns to get the inputs of the fuzzy inference rule table; then we may get a task’s final fuzzy scheduling priority by looking up the fuzzy inference table.

3. TASK MODEL

In general, most tasks of an embedded soft real-time multi-task system are periodic. Every periodic task T_i in an uncertain environment may be described with a 8-tuple:

$$T_i = (S_i, WCET_i, BCET_i, EET_i, AET_i, D_i, T_i, P_i).$$

$$BCET_i \leq AET_i \leq WCET_i \leq D_i, \text{ and } BCET_i \leq EET_i \leq WCET_i \leq D_i, D_i = T_i.$$

S_i is the arrival time of the task T_i , and we assume that arriving time of a task is its ready time; $BCET_i$ is its best case execution time; $WCET_i$ is its worst case execution time; EET_i is its estimated average execution time, AET_i is the actual average execution time which is time varying and unknown to the scheduler in an uncertain environment. D_i is the relative deadline of task T_i ; P_i is its relative criticality and T_i is its period. To the k th ($k \geq 1$) execution of T_i , its absolute ready time is $S_i + (k-1) * T_i$ and its absolute deadline is $S_i + (k-1) * T_i + D_i$, respectively. We call one execution of a periodic task as one instance or one execution

request. In our paper, a periodic task’s deadline missing ratio is defined as the number of deadline misses divided by the total number of a task’s instances in a sampling time window.

4. FUZZIFICATION AND FUZZY INFERENCE

In improved EDF scheduling model based on fuzzy inference, we set the fuzzy set domain as follows:

$$U = \{0.0, 0.1, 0.2, 0.3, 0.4, 0.5, 0.6, 0.7, 0.8, 0.9, 1.0\}$$

The fuzzy partition sets of deadline distance $T(Idx) = \{very\ short, short, normal, long, very\ long\}$, and The fuzzy partition sets of the criticality $T(Icf) = \{low, normal, high\}$ and The fuzzy partition sets of final fuzzy scheduling priorities $T(Op) = \{high, normal, low\}$.

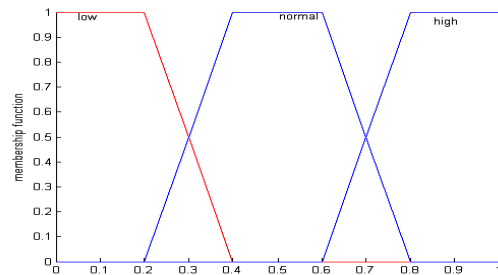


Figure 3. Membership Function of Criticality

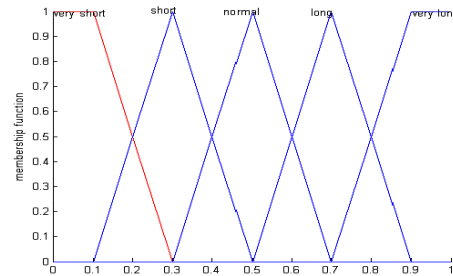


Figure 4. Membership Function of Dead Line Distance

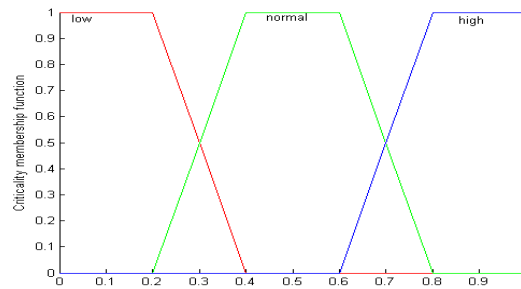


Figure 5. Membership Function of Fuzzy Scheduling priority.

To fuzzify the deadline distance, we transform the deadline distance value (dd denotes the value) of task T_i into its fuzzy set according to the following steps:

- 1) Domain transformation: $rela_deadline_dist = dd / D$, D is the period of task.
- 2) Fuzzification: if $rela_deadline_dist$ is in U , we fuzzify it by singleton method.

5. FUZZY INFERENCE

Fuzzy inference rules, which includes 15 fuzzy inference rules. The rules are as follows:

R1: if (the criticality is *low*) and (the deadline distance is *very short*) then the scheduling fuzzy priority is *low*;

R15: if (the criticality is *high*) and (the deadline distance is *very short*) then the scheduling fuzzy priority is *high*.

Table1: The Fuzzy Inference Rules.

T(Idf)/ T(Op)/ T(Icf)	Very short	short	normal	long	Very long
Low	low	low	low	low	Low
normal	low	normal	normal	normal	high
high	high	high	high	high	high

6.READY TASK QUEUES AND FUZZY SCHEDULING PRIORITY

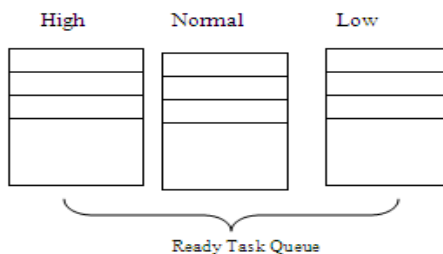


Figure 6 Ready Task Queue Model

The above figure shows the ready task queue model which is composed of three sub queues (corresponding to the fuzzy partition sets of fuzzy scheduling priorities $T(Op) = \{high, normal, low\}$ respectively). All tasks in same ready queue are sorted by their sample “precise” deadline distance. A ready task enters corresponding priority ready sub queue by its fuzzy scheduling priority.

7. SCHEDULING POLICY

In our fuzzy EDF scheduling model, the scheduling policy is as the following:

- 1) To the tasks in different fuzzy priority ready sub queues, the ones which are in the highest fuzzy priority ready sub queue will be scheduled first. So, the ready tasks in the **high** ready sub-queue have highest scheduling priority; only if the **high** ready sub-queue is empty, the ready tasks in **normal** ready sub queue are considered.

Namely the scheduling precedence sequence of ready task sub queues is: **high, normal, low**.

2. To the tasks in the same fuzzy ready priority sub queue, we adopt the EDF scheduling policy, namely the task who has the shortest deadline distance will be scheduled first.
3. in the running of a task, if there is a higher fuzzy priority task is ready, preempt the current task’s running right, namely we adopt the preemptive scheduling policy.

7. CONCLUSION AND FUTURE WORK

The FUZZY EDF algorithm will be developed with this fuzzy inference Rules. So the Miss dead line ratio of the tasks will be reduced compared to traditional EDF algorithm. The Fuzzy EDF algorithm will be implemented in DSP Processor.

ACKNOLWDGEMENT

This work is affiliated to the “Real time scheduling” project which has been supported by SRM University, Department of Electronics and Communication Engineering .

REFERENCES

- [1] C.L.Liu, J.W.Layland. “Scheduling algorithm for Multiprogramming in a hard-real-time environment” Journal of ACM, pp. 46-61: 1973, 20(1).
- [2] Lee J, Tiao A, Yen J. “A fuzzy rule- based approach to real- time scheduling”, Yen J, ed. Proc. of The 3rd IEEE Int’l Conf. on Fuzzy Systems, Vol 2. Piscataway: IEEE Computer Society, pp. 1394~1399, 1994.
- [3] Terrier F, Rioux L, Chen Z. “Real time scheduling Under uncertainty”, Nakanishi, S. ed. Proc. of the 4th IEEE Int’l Conf. on Fuzzy Systems, Vol3. Piscataway: IEEE Computer Society, pp. 1177~1184, 1995.
- [4] Mojtaba Sabeghi, and Mahmoud Naghibzadeh. “AFuzzy Algorithm for Real-Time Scheduling of Soft Periodic Tasks”, IJCSNS International Journal of Computer.
- [5] A. Voloshyn, G. Gnatienco, E. Drobot “Fuzzy Membership functions in a Fuzzy decision making Problem” International Journal "Information Theories & Applications" Vol.10.